

DATE: _____

JOB NAME: _____

PHONE: _____ CUSTOMER: _____



WOOD RAISED CASING DOOR QUOTE

CONSTRUCTION FEATURES

- FRP Full Perimeter Door Frame
- 4" Foamed-in-Place Urethane Door/Frame
- Metal Faced PLY. Interior Casting
- Double Threshold Wiper Gasket
- Frame and Threshold Heater
- Brushed Hardware
- Cam Lift Hinges
- Hydraulic Door Closer
- Magnetic Gasket

WALK-IN INFO

Type: ☐ Cooler ☐ Freezer

Location: ☐ Indoor ☐ Outdoor

Build: ☐ Existing ☐ New Build

Floor: ☐ Recessed ☐ With Ramp Thickness _____ ☐ Floorless

Hinge: ☐ Right Hand ☐ Left Hand

DOOR SPECS

Standard Widths

	Door Opening	Exterior Frame (+13.75")
☐	54"	67.75"
☐	57"	70.75"

☐ Special Width: Door Opening _____ Exterior Frame (+13.75"): _____

Standard Heights

	Door Opening	Exterior Frame (+7.437")
☐	77"	84.437"

☐ Special Height: Door Opening _____ Exterior Frame (+7.437"): _____

HANDLES

- ☐ Non-Lockable Pull (STD)
- ☐ Deadbolt Handle w/Padlock Provision & Inside Release (OPT)

INTERIOR FINISH

- ☐ Acrylume
- ☐ .040 White Smooth Alum.
- ☐ .040 White Stucco Alum.
- ☐ .032 Stucco Alum.
- ☐ 22 Ga. Stainless Steel
- ☐ 20 Ga. Stainless Steel

KICKPLATE INTERIOR


- ☐ Stainless Steel
 - ☐ 22Ga ☐ 20Ga ☐ 18Ga ☐ 16Ga
- ☐ Diamond Treadplate
 - ☐ 1/10" ☐ 1/8"
- ☐ Height: _____

EXTERIOR FINISH


- ☐ Acrylume
- ☐ .040 White Smooth Alum.
- ☐ .040 White Stucco Alum.
- ☐ .032 Stucco Alum.
- ☐ 22 Ga. Stainless Steel
- ☐ 20 Ga. Stainless Steel

KICKPLATE EXTERIOR

- ☐ Stainless Steel
 - ☐ 22Ga ☐ 20Ga ☐ 18Ga ☐ 16Ga
- ☐ Diamond Treadplate
 - ☐ 1/10" ☐ 1/8"
- ☐ Height: _____

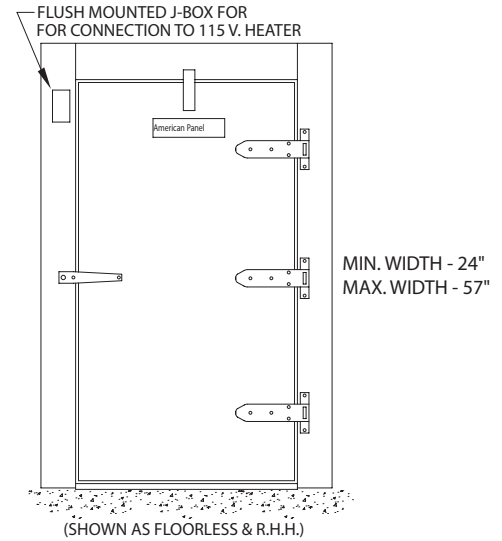

TOP VIEW

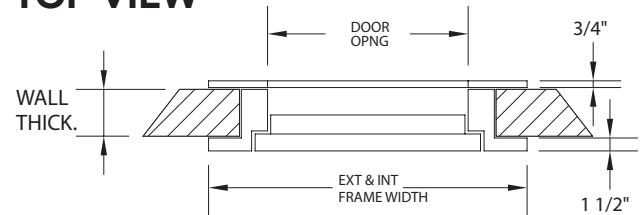

SIDE VIEW

