



Project Name: \_\_\_\_\_

Item #: \_\_\_\_\_

Quantity: \_\_\_\_\_

**Type:** Blast Chiller/Shock Freezer (Self-Contained)  
**Model:** AP10BCF100-2-P

**HURRICHILL**

Blast Chiller/Shock Freezer (Self-Contained) - AP10BCF100-2-P

#### Standard Features

##### PERFORMANCE:

- Blast chilling (soft or hard) lowers the food core temperature from 160°F to 38°F within 90 minutes.
- Shock freezing lowers the food core temperature from 160°F to 0°F within 4 hours.
- *Chilling times will vary somewhat, depending on the food quantity, initial temperature, density, moisture content, specific heat, and type of container.*
- The airflow has a high velocity, indirect pattern designed to cool all levels at identical rates.
- Time/temperature chilling rates meet or exceed all FDA, NSF, and state regulations.

##### TOUCHSCREEN CONTROLS:

- 7" glove-safe capacitive touchscreen
- Easily readable from across the kitchen
- User friendly interface and quick access to all functions
- Quick-start button for one touch operation
- Capable of automated defrost and sanitation cycles
- HACCP logger, data download via optional Wifi card or USB port
- Available cycles - Soft Chill, Hard Chill, Shock Freeze, Quick Start
- One core temperature probe is provided

##### CABINET CONSTRUCTION:

- Constructed of polished type 304 stainless steel,
- 2" of CFC-free, high density polyurethane insulation.
- Interior has a mirror finish and fully rounded interior bottom
- Removable magnetic door gasket.
- Door is hinged on the operator's left
- 6' long four wire cord set with NEMA 6-15P plug provided
- 6" height adjustable legs
- Clearance: 31" at the front for door opening, 5" at the back, and 3" either side

##### REFRIGERATION SYSTEM:

- Self contained refrigeration
- E-coated (electro-deposition coated) multiple circuits evaporator designed specifically for blast chilling operation
- Wash-down type motorized impeller fans with sealed ball bearing and overload protection
- Hinged swing out vent panel for easy evaporator cleaning
- Condensing unit uses R290 refrigerant



#### Warranty

3 year parts & labor standard warranty.

Warranty excludes food probes.

The compressor only is covered for an additional period of two years, as a part only, no labor.



**Overview:** American Panel's blast chillers and shock freezers are the perfect product for all of your chilling and freezing needs. These units are completely self contained and ready for plug and play operation. The HURRICHILL series of chillers also features a consolidated evaporator fan assembly. This places all of the components within the cabinet, which greatly reduces the overall footprint of the unit. American Panel quality and precision in a flexible format to fit your needs.

#### Capacity

10 pan slides - each pan slide can hold (1) 12" x 20" x 2.5" pan

#### Product Yield

100 lbs. - 160°F - 38°F in 90 minutes

70 lbs. - 160°F - 0°F in 240 minutes

#### Certifications



Type: Blast Chiller/Shock Freezer (Self-Contained)


Model: AP10BCF100-2-P



Dimensions

INSTALLATION: A detailed installation manual is provided. It must be carefully followed to ensure proper operation and to protect your rights under the warranty.

Model	H	W	D	Eq. Weight	Ship Weight
AP10BCF100-2-P	63 3/16"	29 9/16"	34"	342 lbs.	604 lbs.

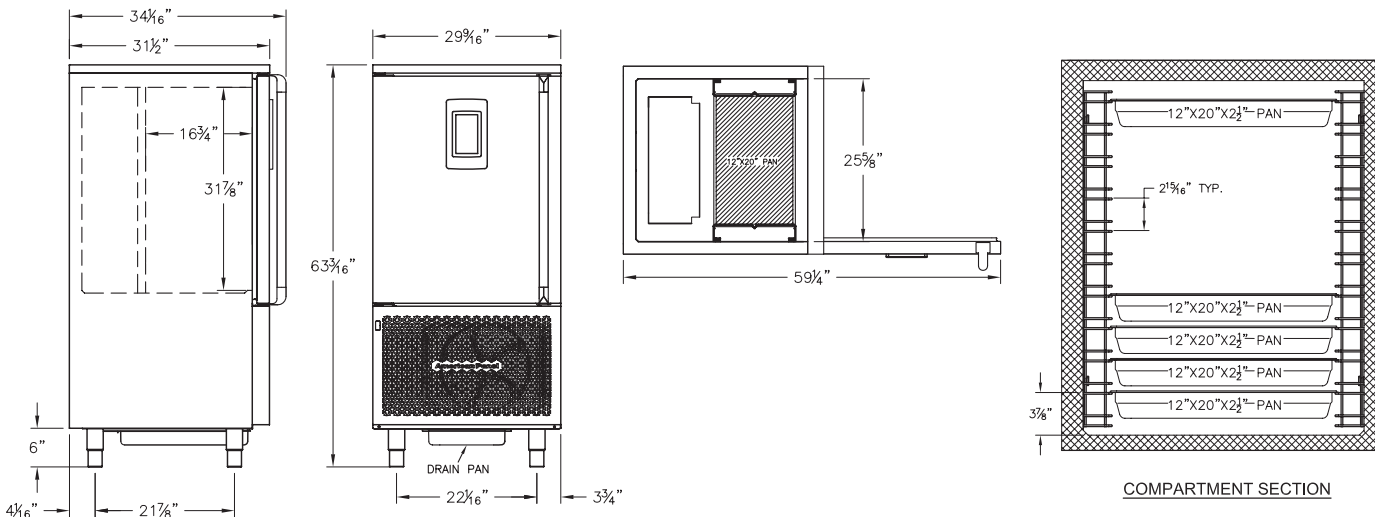

Utility Specifications

Model	Electrical							Heat of Rejection BTU/HR	Refrigeration System			
	V	Hz	PH	A	MCA	MOPD	PLUG		Compressor HP	Ref	Charge Amount	BTU/HR* Capacity
AP10BCF100-2-P	208	60	1	11.0	20	20	6-15P	12,000	1.5	R290	5.29 oz	11,690

\* - Rating at 14°F SST and 105°F cond. temp.

Controller



**Soft Chilling:** The air temperature is held in the range of 28°F to 35°F, the cycle is completed when the food core temperature reaches 38°F.

**Hard Chilling:** The air temperature is lowered to and held within a range of 10°F to 20°F. When the food core temperature reaches 60°F, the air temperature rises to a range of 28°F to 35°F. The chilling cycle is completed when the food core temperature reaches 38°F.

**Shock Freeze:** The air temperature is lowered to and held within a range of -25°F and -15°F. The freezing cycle is completed when the food core temperature reaches 0°F.

**Quick Start:** Programmable single touch button to start a cycle.

ADDITIONAL FUNCTIONS:

**Holding:** At the end of any cycle, the unit will automatically switch to a holding mode.

**Defrost:** A heated defrost cycle is included.

Options and Accessories

- Cabinet Sanitation:** The automated sanitation cycle and odor control system keeps the chiller fresh and free of contamination. The patented technology creates PhotoPlasma® by recirculating air inside the blast chiller over a UV light. This PhotoPlasma® treats the air and surfaces inside the blast chiller to neutralize odors at their sources and to inhibit the growth of contamination. The system is not intended to sanitize food.
- USB HACCP Interface:** Use a standard USB thumb drive to easily download HACCP data. The information recorded includes date, time, cycle identification, recipe name, and product core temperature at prescribed intervals.
- Wi-Fi Connectivity:** Supported functions include peer-to-peer connectivity, remote monitoring over the local network, HACCP data download and alarm notifications via e-mail.
- Extra Food Probes:** One probe is standard, up to three additional probes can be provided.
- Heavy duty casters,** Heavy duty 5" casters, two with brakes
- Condensate evaporator:** The optional condensate evaporator is provided with a cord and plug NEMA 5-15P and requires a separate 120V/60Hz/1Ph power supply. The condensate evaporator will mount onto the left side of the unit and extends the width of the unit by 8".
- Bumper Rail:** 2" wide bumper rail mounted on either side of the unit, the center line of the bumper rail will be located at 36" AFF.
- Thaw Package:** to include a thaw probe, sanitary bit, and a battery operated drill (automatic thawing requires probing the frozen product).
- Probe holder for liquids:** The probe support will clip onto the edge of a standard steam table pan.
- Drain line assembly:** By default the unit is provided with a drain pan that needs to be emptied daily. The drain line assembly will make it easy to hook up the unit to a floor sink.